

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 853 377 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
15.07.1998 Bulletin 1998/29

(51) Int. Cl.⁶: H03D 9/06

(21) Application number: 97122206.2

(22) Date of filing: 16.12.1997

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 16.12.1996 JP 335690/96
27.11.1997 JP 326441/97

(71) Applicant:
MURATA MANUFACTURING CO., LTD.
Nagaokakyo-shi Kyoto-fu (JP)

(72) Inventors:
• Yagi, Yoshikazu
Nagaokakyo-shi, Kyoto-fu (JP)
• Sasaki, Yutaka
Nagaokakyo-shi, Kyoto-fu (JP)
• Tanaka, Hiroaki
Nagaokakyo-shi, Kyoto-fu (JP)

(74) Representative:
Schoppe, Fritz, Dipl.-Ing.
Schoppe & Zimmermann
Patentanwälte
Postfach 71 08 67
81458 München (DE)

(54) Four-phase phase converter

(57) In four microstriplines (2, 3, 4, 5) disposed close such that they are coupled with each other, the left-hand end of the third microstripline (4) serves as an input (6), the left-hand ends of the first and second microstriplines (2, 3) and the right-hand ends of the first

and fourth microstriplines (2, 5) serve as outputs (7, 8, 9, 10), and the right-hand end of the second microstripline (3) and the left-hand end of the fourth microstripline (5) are grounded.

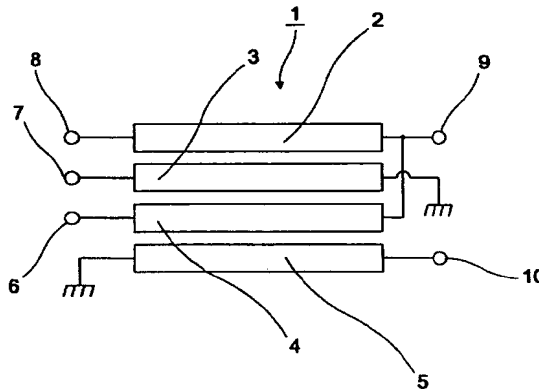


FIG. 1

EP 0 853 377 A2

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to four-phase phase converters, and more particularly, to a four-phase phase converter used for QPSK modulation.

2. Description of the Related Art

Fig. 6 shows a conventional four-phase phase converter. In Fig. 6, a four-phase phase converter 100 includes a signal input terminal 101, a directive coupler 102 connected to the signal input terminal, unbalanced-to-balanced converters 103 and 104 connected to two outputs of the directive coupler 102, and signal output terminals 105, 106, 107, and 108 connected to two outputs of each of the unbalanced-to-balanced converters 103 and 104. The directive coupler 102, and the unbalanced-to-balanced converters 103 and 104 are formed of a combination of $\lambda/4$ microstriplines. Since their configurations are of general types, the descriptions thereof will be omitted.

In the four-phase phase converter 100 configured as described above, a signal input to the signal input terminal 101 is converted to two signals having phases 90 degrees apart in the directive coupler 102, and they are input to the unbalanced-to-balanced converters 103 and 104. Each of the signals input to the unbalanced-to-balanced converters 103 and 104 is converted to two signals having phases 180 degrees apart and output from the signal output terminals 105, 106, 107, and 108. As a result, one signal is divided into four signals having phases 90 degrees different from each other.

In the conventional case described above, however, one directive coupler and two unbalanced-to-balanced converters, namely, three phase shifters are required to obtain one four-phase phase converter. Since this requires an area for forming eight microstriplines and certain clearances between the phase shifters in order to avoid coupling between the phase shifters, the required area is large and therefore the cost increases. In addition, an assembling cost for assembling each phase shifter is also necessary. Furthermore, since the directive coupler and the unbalanced-to-balanced converters are manufactured independently, phase deviation caused in assembling becomes large.

SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide an inexpensive four-phase phase converter requiring a small area and a low manufacturing cost.

The object of the present invention is achieved in one aspect of the present invention through the provision of a four-phase phase converter including first, sec-

ond, third, and fourth transmission lines sequentially disposed in parallel to couple with each other, wherein the length of the coupling sections of the first, second, third, and fourth transmission lines is set to one fourth the wavelength of the signal to be used at its frequency; and among the ends of the first, second, third, and fourth transmission lines, one end serves as a signal input end, four ends serve as signal output ends, two ends are connected to the ground, and the other one end is connected to one of the four signal output ends.

The four-phase phase converter may be configured such that the left-hand end of the third transmission line serves as a signal input end; the left-hand ends of the first and second transmission lines and the right-hand ends of the first and fourth transmission lines serve as signal output ends; the right-hand end of the second transmission line and the left-hand end of the fourth transmission line are grounded; and the right-hand end of the third transmission line is connected to the right-hand end of the first transmission line.

The four-phase phase converter may also be configured such that the left-hand end of the second transmission line serves as a signal input end; the left-hand ends of the third and fourth transmission lines and the right-hand ends of the first and second transmission lines serve as signal output ends; the left-hand end of the first transmission line and the right-hand end of the fourth transmission line are grounded; and the right-hand end of the third transmission line is connected to the right-hand end of the second transmission line.

The object of the present invention is achieved in another aspect of the present invention through the provision of a four-phase phase converter including first, second, third, and fourth transmission lines sequentially disposed in parallel in the horizontal direction to couple with each other; wherein the length of the coupling sections of the first, second, third, and fourth transmission lines is set to one fourth the wavelength of the signal to be used at its frequency; and among the ends of the first, second, third, and fourth transmission lines, one end serves as a signal input end, four ends serve as signal output ends, one end is connected to the ground, and the other two ends are connected to two of the four signal output ends.

The four-phase phase converter may be configured such that the left-hand end of the first transmission line serves as a signal input end; the left-hand ends of the second and fourth transmission lines and the right-hand ends of the first and second transmission lines serve as signal output ends; the right-hand end of the third transmission line is grounded; and the left-hand end of the third transmission line is connected to the left-hand end of the second transmission line, and the right-hand end of the fourth transmission line is connected to the right-hand end of the first transmission line.

According to a four-phase phase converter of the present invention, since four $\lambda/4$ transmission lines are

arranged such that they are coupled with each other, and among the eight ends thereof, one end is used as an input end, four ends are used as output ends, and the other ends are grounded or connected to an output end, an inexpensive four-phase phase converter requiring a small area and a small phase variation is obtained.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a four-phase phase converter according to an embodiment of the present invention.

Fig. 2 shows a phase characteristic of the four-phase phase converter shown in Fig. 1.

Fig. 3 shows a four-phase phase converter according to another embodiment of the present invention.

Fig. 4 shows a four-phase phase converter according to still another embodiment of the present invention.

Fig. 5 is a perspective view of a four-phase phase converter according to yet another embodiment of the present invention.

Fig. 6 shows a conventional four-phase phase converter.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 shows a four-phase phase converter according to an embodiment of the present invention. In Fig. 1, a four-phase phase converter 1 includes microstriplines 2, 3, 4, and 5 serving as first, second, third, and fourth transmission lines disposed close such that they are coupled with each other, a signal input terminal 6, and signal output terminals 7, 8, 9, and 10.

The signal input terminal 6 is connected to the left-hand end of the third microstripline 4 serving as a signal input end, the signal output terminal 7 is connected to the left-hand end of the second microstripline 3 serving as a first signal output end, the signal output terminal 8 is connected to the left-hand end of the first microstripline 2 serving as a second signal output end, the signal output terminal 9 is connected to the right-hand end of the first microstripline 2 serving as a third signal output end, and the signal output terminal 10 is connected to the right-hand end of the fourth microstripline 5 serving as a fourth signal output end. The right-hand ends of the first and third microstriplines 2 and 4 are connected to each other, and the right-hand end of the second microstripline 3 and the left-hand end of the fourth microstripline 5 are grounded.

The microstriplines 2, 3, 4, and 5 are set such that their length equals one fourth the wavelength of the signal to be used at its frequency.

In the four-phase phase converter 1 configured as described above, when a signal is input to the signal input terminal 6, signals having phases 90 degrees apart from each other are output from the signal output terminals 7, 8, 9, and 10.

Fig. 2 is a graph indicating a phase characteristic of

the four-phase phase converter 1 shown in Fig. 1. In Fig. 2, the horizontal axis indicates a frequency and the vertical axis indicates the phase shift of an output signal from the phase of the corresponding input signal. In Fig. 2, curve "a" indicates the phase shift of a signal output from the signal output terminal 7 from the phase of the corresponding input signal, curve "b" indicates the phase shift of a signal output from the signal output terminal 8, curve "c" indicates the phase shift of a signal output from the signal output terminal 9, and curve "d" indicates the phase shift of a signal output from the output signal terminal 10. The phases of the four outputs are different from each other by 90 degrees at 2.7 GHz, which is the frequency of the used signal, as shown in Fig. 2.

Fig. 3 shows a four-phase phase converter according to another embodiment of the present invention. In Fig. 3, a four-phase phase converter 20 includes microstriplines 21, 22, 23, and 24 serving as first, second, third, and fourth transmission lines disposed close such that they are coupled with each other, a signal input terminal 25, and signal output terminals 26, 27, 28, and 29.

The signal input terminal 25 is connected to the left-hand end of the second microstripline 22 serving as a signal input end, the signal output terminal 26 is connected to the left-hand end of the third microstripline 23 serving as a first signal output end, the signal output terminal 27 is connected to the left-hand end of the fourth microstripline 24 serving as a second signal output end, the signal output terminal 28 is connected to the right-hand end of the first microstripline 21 serving as a third signal output end, and the signal output terminal 29 is connected to the right-hand end of the second microstripline 22 serving as a fourth signal output end. The right-hand ends of the second and third microstriplines 22 and 23 are connected to each other, and the left-hand end of the first microstripline 21 and the right-hand end of the fourth microstripline 24 are grounded.

The microstriplines 21, 22, 23, and 24 are set such that their length equals one fourth the wavelength of the signal to be used at its frequency.

In the four-phase phase converter 20 configured as described above, when a signal is input to the signal input terminal 25, signals having phases 90 degrees apart from each other are output from the signal output terminals 26, 27, 28, and 29.

Fig. 4 shows a four-phase phase converter according to still another embodiment of the present invention. In Fig. 4, a four-phase phase converter 30 includes microstriplines 31, 32, 33, and 34 serving as first, second, third, and fourth transmission lines disposed close such that they are coupled with each other, a signal input terminal 35, and signal output terminals 36, 37, 38, and 39.

The signal input terminal 35 is connected to the left-hand end of the first microstripline 31 serving as a signal input end, the signal output terminal 36 is connected to the left-hand end of the second microstripline 32

serving as a first signal output end, the signal output terminal 37 is connected to the left-hand end of the fourth microstripline 34 serving as a second signal output end, the signal output terminal 38 is connected to the right-hand end of the first microstripline 31 serving as a third signal output end, and the signal output terminal 39 is connected to the right-hand end of the second microstripline 32 serving as a fourth signal output end. The left-hand ends of the second and third microstriplines 32 and 33 are connected to each other, the right-hand ends of the first and fourth microstriplines 31 and 34 are connected to each other, and the right-hand end of the third microstripline 33 is grounded.

The microstriplines 31, 32, 33, and 34 are set such that their length equals one fourth the wavelength of the signal to be used at its frequency.

In the four-phase phase converter 30 configured as described above, when a signal is input to the signal input terminal 35, signals having phases 90 degrees apart from each other are output from the signal output terminals 36, 37, 38, and 39.

Fig. 5 shows a four-phase phase converter according to yet another embodiment of the present invention. In Fig. 5, a four-phase phase converter 40 includes strip conductors 42, 43, 44, and 45 serving as first, second, third, and fourth transmission lines laminated with a dielectric 41 sandwiched therebetween to form a multilayer structure and disposed with appropriate gaps therebetween such that they are coupled with each other, a signal input terminal 46, and signal output terminals 47, 48, 49, and 50.

The signal input terminal 46 is connected to the left-hand end of the third strip conductor 44 serving as a signal input end, the signal output terminal 47 is connected to the left-hand end of the second strip conductor 43 serving as a first signal output end, the signal output terminal 48 is connected to the left-hand end of the first strip conductor 42 serving as a second signal output end, the signal output terminal 49 is connected to the right-hand end of the first strip conductor 42 serving as a third signal output end, and the signal output terminal 50 is connected to the right-hand end of the fourth strip conductor 45 serving as a fourth signal output end. The right-hand ends of the first and third strip conductors 42 and 44 are connected to each other, and the right-hand end of the second strip conductor 43 and the left-hand end of the fourth strip conductor 45 are grounded.

The strip conductors 42, 43, 44, and 45 are set such that their length equals one fourth the wavelength of the signal to be used at its frequency.

The input and output terminals and ground connection of each transmission line in the four-phase phase converter 40 are the same as those in the four-phase phase converter 1 shown in Fig. 1.

In the four-phase phase converter 40 configured as described above, when a signal is input to the signal input terminal 46, signals having phases 90 degrees apart from each other are output from the signal output

terminals 47, 48, 49, and 50.

In the present invention, as shown in each of the above embodiments, among the eight ends of four transmission lines sequentially disposed in parallel to couple with each other, one end is used as an input end, four ends are used as output ends, and the other ends are grounded or connected to either of the output ends to form a four-phase phase converter. With this configuration, an area required for the four-phase phase converter is made smaller and the cost thereof is made more inexpensive. In addition, since a plurality of phase shifters do not need to be combined, phase variation becomes small.

In the above embodiments, straight microstriplines and strip conductors are used as transmission lines. They may be formed in a curved shape such as a meander-shape or a spiral shape with the positional relationship between the four transmission lines being maintained. In the above embodiments, microstriplines and strip conductors are used. Other transmission lines such as strip lines and electrically conductive cables may be used, and the same advantages are obtained in that case.

Claims

1. A four-phase phase converter (1; 20; 40) comprising first, second, third, and fourth transmission lines (2, 3, 4, 5; 21, 22, 23, 24; 42, 43, 44, 45) sequentially disposed in parallel to couple with each other, wherein the length of the coupling sections of said first, second, third, and fourth transmission lines (2, 3, 4, 5; 21, 22, 23, 24; 42, 43, 44, 45) is set to one fourth the wavelength of the signal to be used at its frequency; and

among the ends of said first, second, third, and fourth transmission lines (2, 3, 4, 5; 21, 22, 23, 24; 42, 43, 44, 45), one end serves as a signal input end (6; 25; 46), four ends serve as signal output ends (7, 8, 9, 10; 26, 27, 28, 29; 47, 48, 49, 50), two ends are connected to the ground, and the other one end is connected to one of the four signal output ends.

2. A four-phase phase converter (1; 40) according to Claim 1, wherein the left-hand end of said third transmission line (4; 44) serves as a signal input end (6; 46);

the left-hand ends of said first and second transmission lines (2, 3; 42, 43) and the right-hand ends of said first and fourth transmission lines (2, 5; 42, 45) serve as signal output ends (7, 8, 9, 10; 47, 48, 49, 50); the right-hand end of said second transmission line (3; 43) and the left-hand end of said fourth transmission line (5; 45) are grounded; and

the right-hand end of said third transmission line (4; 44) is connected to the right-hand end of said first transmission line (2; 42).

3. A four-phase phase converter (20) according to Claim 1,
wherein the left-hand end of said second transmission line (22) serves as a signal input end (25);

the left-hand ends of said third and fourth transmission lines (23, 24) and the right-hand ends of said first and second transmission lines (21, 22) serve as signal output ends (26, 27, 28, 29);

the left-hand end of said first transmission line (21) and the right-hand end of said fourth transmission line (24) are grounded; and
the right-hand end of said third transmission line (23) is connected to the right-hand end of said second transmission line (22).

4. A four-phase phase converter (30) comprising first, second, third, and fourth transmission lines (31, 32, 33, 34) sequentially disposed in parallel in the horizontal direction to couple with each other;
wherein the length of the coupling sections of said first, second, third, and fourth transmission lines (31, 32, 33, 34) is set to one fourth the wavelength of the signal to be used at its frequency; and

among the ends of said first, second, third, and fourth transmission lines (31, 32, 33, 34), one end serves as a signal input end (35), four ends serve as signal output ends (36, 37, 38, 39), one end is connected to the ground, and the other two ends are connected to two (36, 38) of the four signal output ends.

5. A four-phase phase converter (30) according to Claim 4,
wherein the left-hand end of said first transmission line (31) serves as a signal input end (35);

the left-hand ends of said second and fourth transmission (32, 34) lines and the right-hand ends of said first and second transmission lines (31, 32) serve as signal output ends (36, 37, 38, 39);

the right-hand end of said third transmission line (33) is grounded; and
the left-hand end of said third transmission line (33) is connected to the left-hand end of said second transmission line (32), and the right-hand end of said fourth transmission line (34) is connected to the right-hand end of said first transmission line (31).

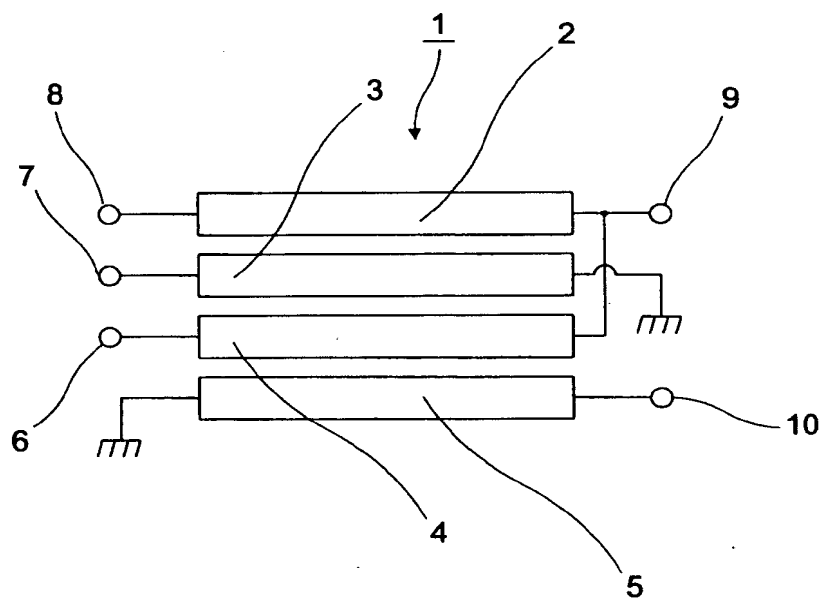


FIG.1

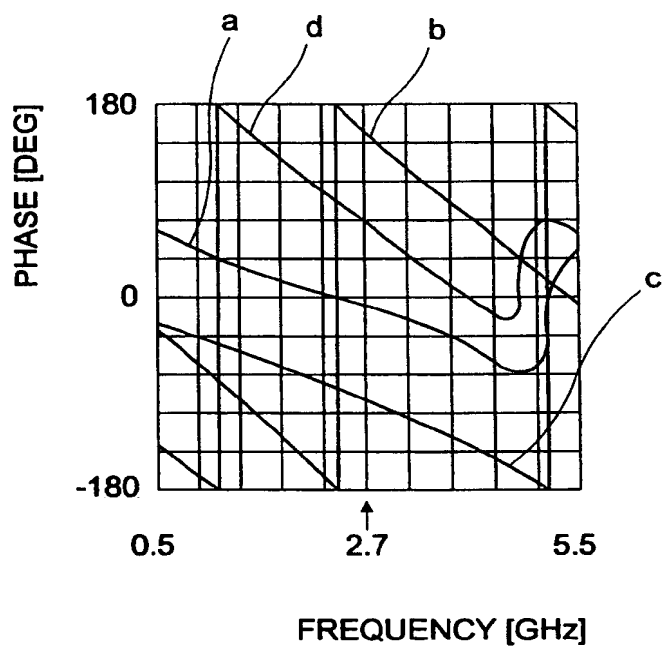


FIG.2

FIG.3

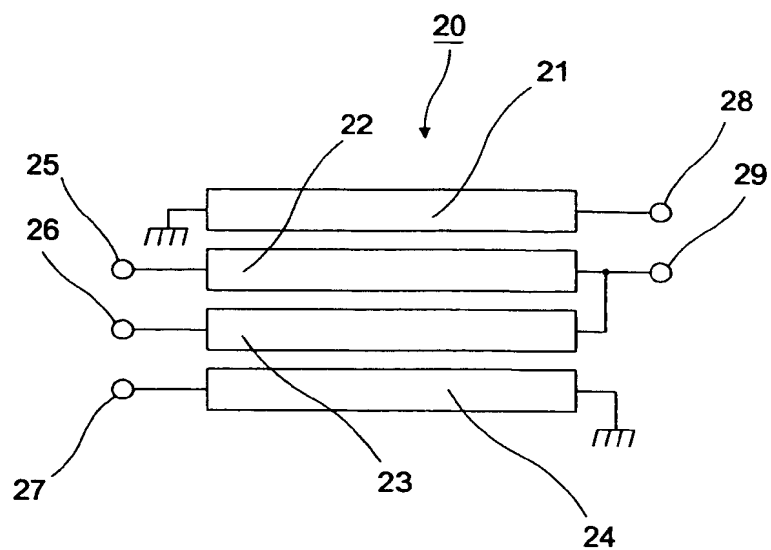


FIG.4

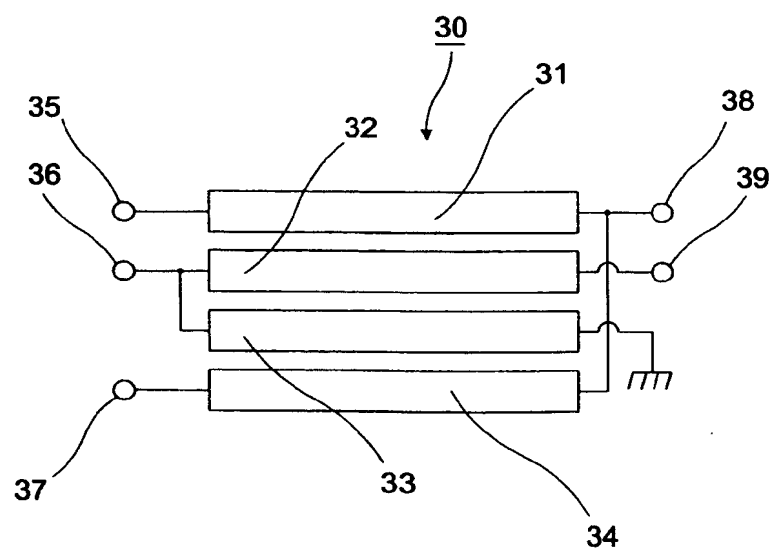
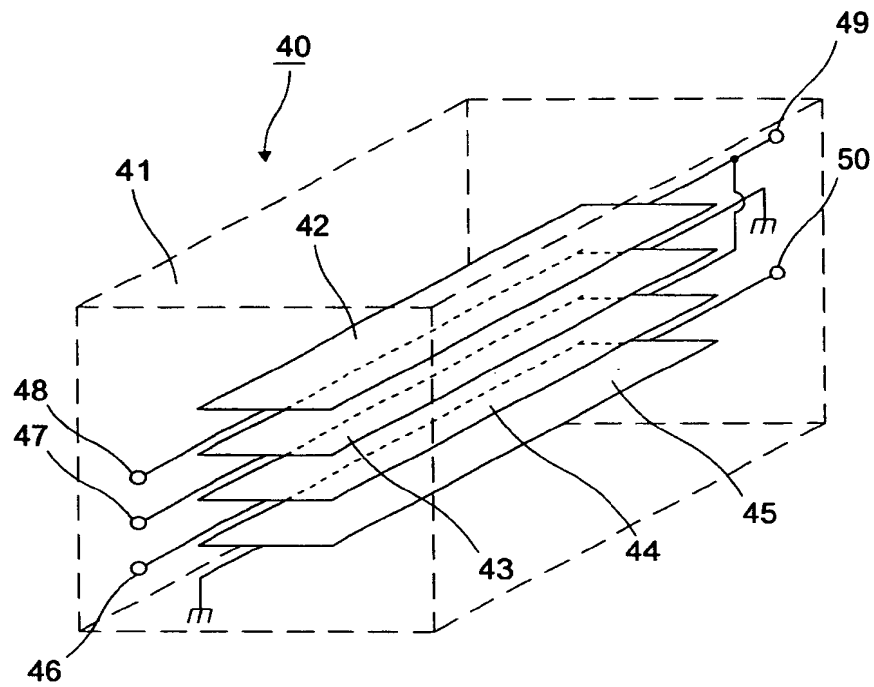


FIG.5




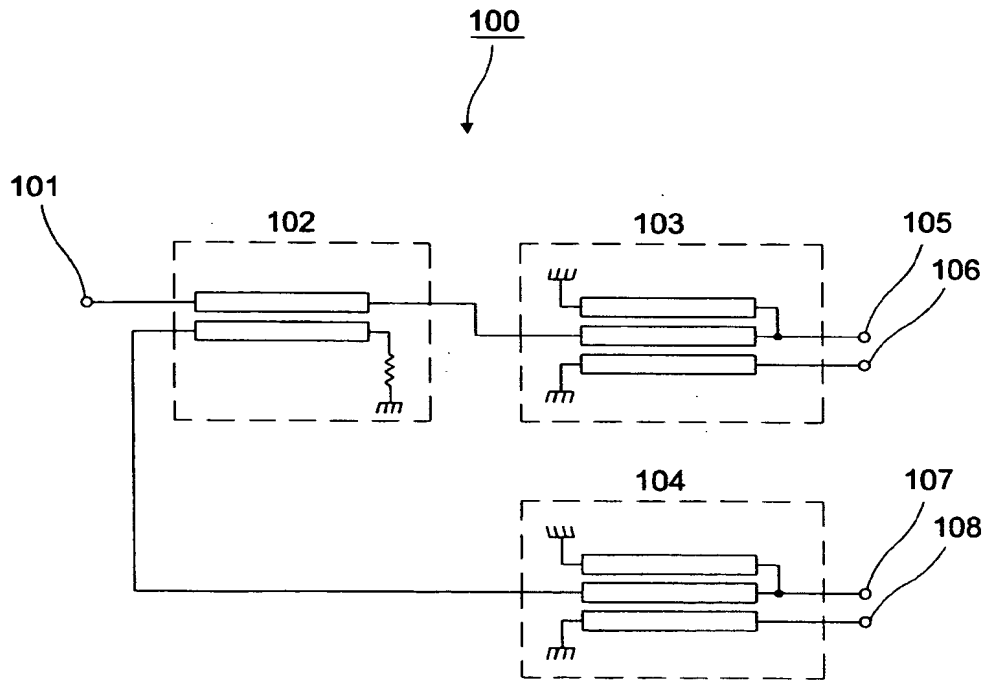


FIG.6





Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 853 377 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
09.08.2000 Bulletin 2000/32

(51) Int. Cl.⁷: H01P 1/18

(43) Date of publication A2:
15.07.1998 Bulletin 1998/29

(21) Application number: 97122206.2

(22) Date of filing: 16.12.1997

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 16.12.1996 JP 33569096
27.11.1997 JP 32644197

(71) Applicant:
MURATA MANUFACTURING CO., LTD.
Nagaokakyo-shi Kyoto-fu (JP)

(72) Inventors:
• Yagi, Yoshikazu
Nagaokakyo-shi, Kyoto-fu (JP)
• Sasaki, Yutaka
Nagaokakyo-shi, Kyoto-fu (JP)
• Tanaka, Hiroaki
Nagaokakyo-shi, Kyoto-fu (JP)

(74) Representative:
Schoppe, Fritz, Dipl.-Ing.
Schoppe, Zimmermann & Stöckeler
Patentanwälte
Postfach 71 08 67
81458 München (DE)

(54) Four-phase phase converter

(57) In four microstriplines (2, 3, 4, 5) disposed close such that they are coupled with each other, the left-hand end of the third microstripline (4) serves as an input (6), the left-hand ends of the first and second microstriplines (2, 3) and the right-hand ends of the first and fourth microstriplines (2, 5) serve as outputs (7, 8, 9, 10), and the right-hand end of the second microstripline (3) and the left-hand end of the fourth microstripline (5) are grounded.

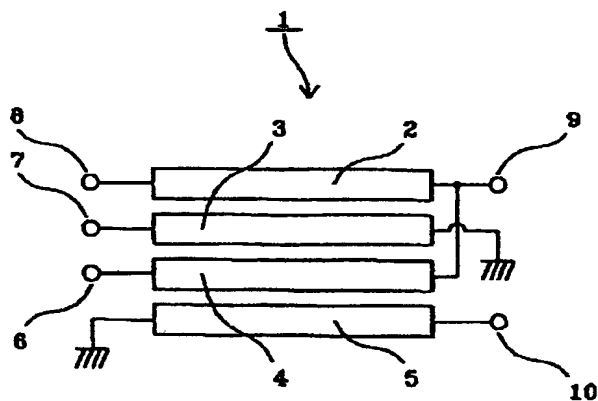


FIG. 1

EP 0 853 377 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 12 2206

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.8)
A	EP 0 379 202 A (FUJITSU LTD) 25 July 1990 (1990-07-25) * column 5, line 1 - column 7, line 26; figures 3-7 *	1-5	H01P1/18
A	PATENT ABSTRACTS OF JAPAN vol. 008, no. 281 (E-286), 21 December 1984 (1984-12-21) & JP 59 148405 A (MATSUSHITA DENKI SANGYO KK), 25 August 1984 (1984-08-25) * abstract *	1-5	
A	EP 0 508 663 A (HARRIS CORP) 14 October 1992 (1992-10-14) * column 5, line 17 - column 6, line 34; figure 2 *		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.8)
			H01P
Place of search		Date of completion of the search	Examiner
MUNICH		15 June 2000	La Casta Muñoa, S
CATEGORY OF CITED DOCUMENTS			
<p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 97 12 2206

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-06-2000

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 0379202	A	25-07-1990	JP	2190003 A	26-07-1990
			DE	69023518 D	21-12-1995
			US	5107223 A	21-04-1992
JP 59148405	A	25-08-1984	NONE		
EP 0508663	A	14-10-1992	US	5126704 A	30-06-1992
			CA	2065199 A,C	12-10-1992
			JP	5160615 A	25-06-1993

EPO FORM P0159 For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

